

# MONNITLINK™

## Cellular Gateway

### Technical Overview



### General Description

Don't have an existing network connection where you need it most? The MonnitLink™ Cellular gateway allows your Monnit Wireless Sensors to communicate with the iMonnit™ Online Wireless Sensor Monitoring and Notification System via cellular transmission. This is the perfect solution for remote locations, or where an existing internet connection is not an option.

Our new cellular gateway is an advanced all wireless M2M gateway that enables fast time-to-market solutions for a wide range of M2M applications.

The MonnitLink Cellular Gateway is based on the latest Quad-band GPRS/GSM wireless engine and comes integrated with Monnit's wireless access point network (WAN) for use with all Monnit wireless sensors.

Monnit's cellular gateway is specifically designed to respond to the increasing market need for global technology that accommodates a variety of vertical M2M application segments and remote wireless sensor management solutions.

The gateway comes pre-activated on the Monnit global cellular network, avoiding the need to negotiate with mobile carriers for a cellular service contract. Enjoy reliable, low cost cellular services developed specifically for our wireless sensor networks.

### MonnitLink™ Cellular Gateway Features


- Supports multiple RF technologies including 900, 868 and 433MHz sensor solutions
- True plug & play, no hassles for internet configuration set-up
- No PC required for operation
- Low-cost cellular service packages
- Remote software upgrade capability
- Local status LEDs with transmission and online status indicators
- Watchdog function and on-line heart-beat control
- Portable with battery back-up
- Power saving sleep mode
- Power outage notification
- AC power supply
- Local, audible alarm
- Location parameter (cell tower triangulation)
- Quad Band GSM/GPRS engine 850/900/1800/1900 MHz



### Applications

- Remote Location Monitoring
- Agricultural Monitoring
- Vacant Property Management
- Vacation Home Property Management
- Construction Site Monitoring
- Data Center Monitoring

***The Leader in Low Cost Wireless Sensors***

## Monnit Cellular Gateway Specifications

<b>Cellular</b>	
GSM/GPRS	Quad Band GSM/GPRS engine that works on frequencies Frequency Range (MHz):850-900/1800-1900MHZ
Antenna	Connector: SMA Gain (dBi):1.5
<b>Interfaces</b>	
RS232	UART interface for Debugging and future added features
<b>Power</b>	
I/P	5 V- 2A DC power supply
Low Power Mode	Available
Battery Back Up	Available
<b>Mechanical</b>	
LEDs	H/W status LED, GPRS status LED,APN status LED
Enclosure	ABS
Dimensions	140 x 102 x 35 mm
Weight	14 ounces
<b>Environmental</b>	
Operating Temperature	-10 to +70 °C (14 to 158 °F)
Storage Temperature	-20 to +85 °C (-4 to 185 °F)
Certifications:	 900 MHz product; FCC ID: ZTL- RFSC1 and IC: 9794A-RFSC1. 868 and 433 MHz product tested and found to comply with: CISPR 22:2008-09 / EN 55022:2010 - Class B and ETSI EN 300 220-2 V2.4.1 (2012-05).

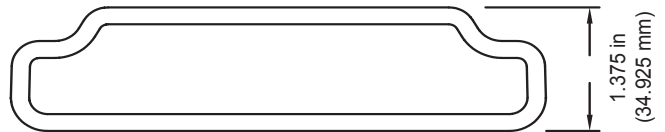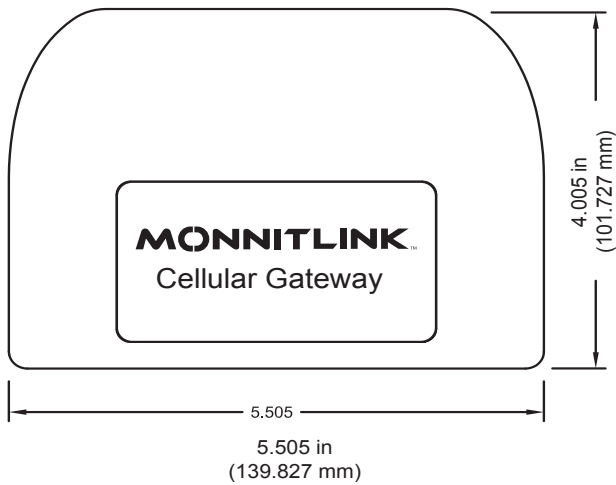

Monnit Corporation  
 7304 South Cottonwood  
 Suite #204  
 Midvale, Utah 84047  
 801-561-5555  
[www.monnit.com](http://www.monnit.com)

For more information about our products or to place an order, please contact our sales department at 801-561-5555.

Visit us on the web at [www.monnit.com](http://www.monnit.com).